

Modularized LNG Plants




Caribbean FLNG delivered by Wison

State-of-the-art liquefaction plant for on-shore deployment.

Key Features

- Scalable capacity
- Lower CAPEX
- Maximum modularization design
- Competitive Schedule

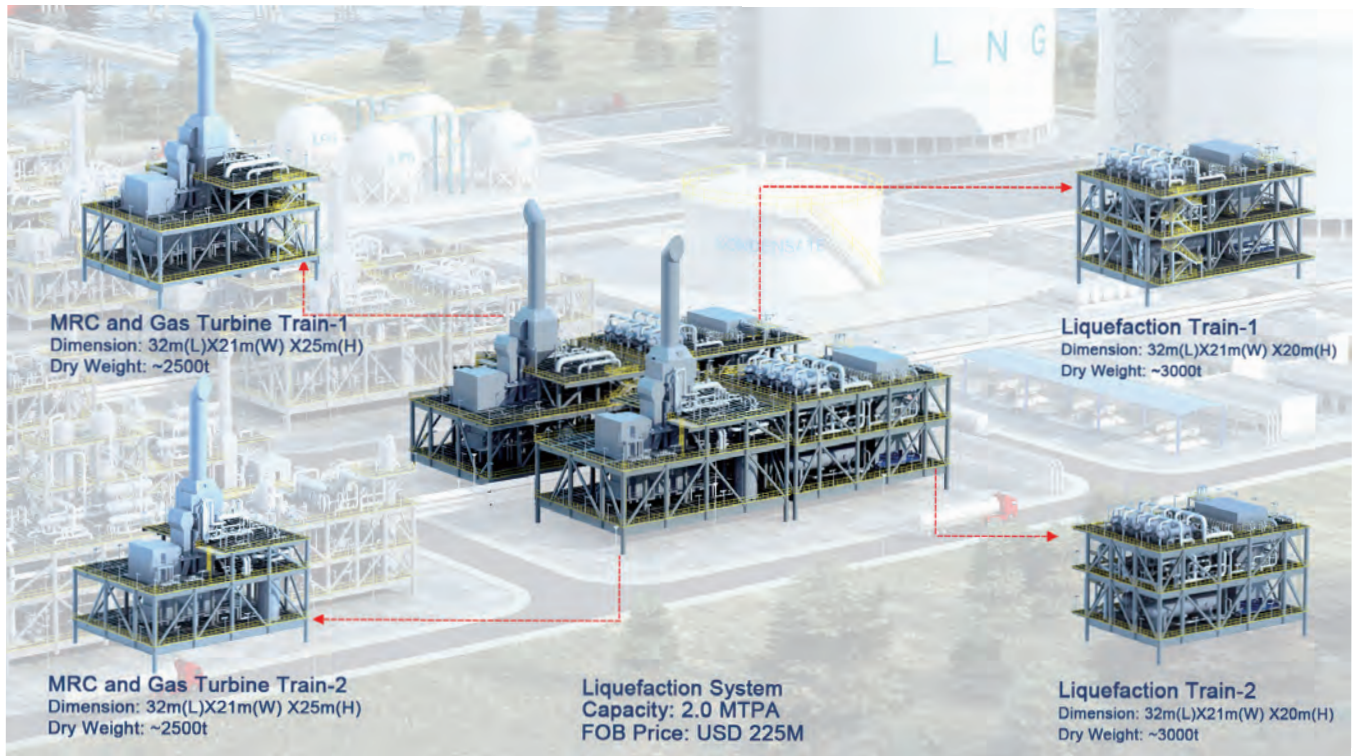

Capacity: 2.0 MTPA / Train
Cost : Liquefaction module \$2.25 million / Pretreatment module \$1 million

Main Parameters

- MRC Driver: LM6000PF+
- Cold Box (Chart)

Gas processing: 4 modules

- Acid Gas Removal
- Dehydration & Mercury Removal
- NGL Extraction & Feed Gas Booster
- Inlet Facilities & Condensate Stabilization

Product Storage

- LNG 2 x 200,000 m3
- LPG 4 x 3,000 m3
- Condensate 20,000 m3